



FIG. 1

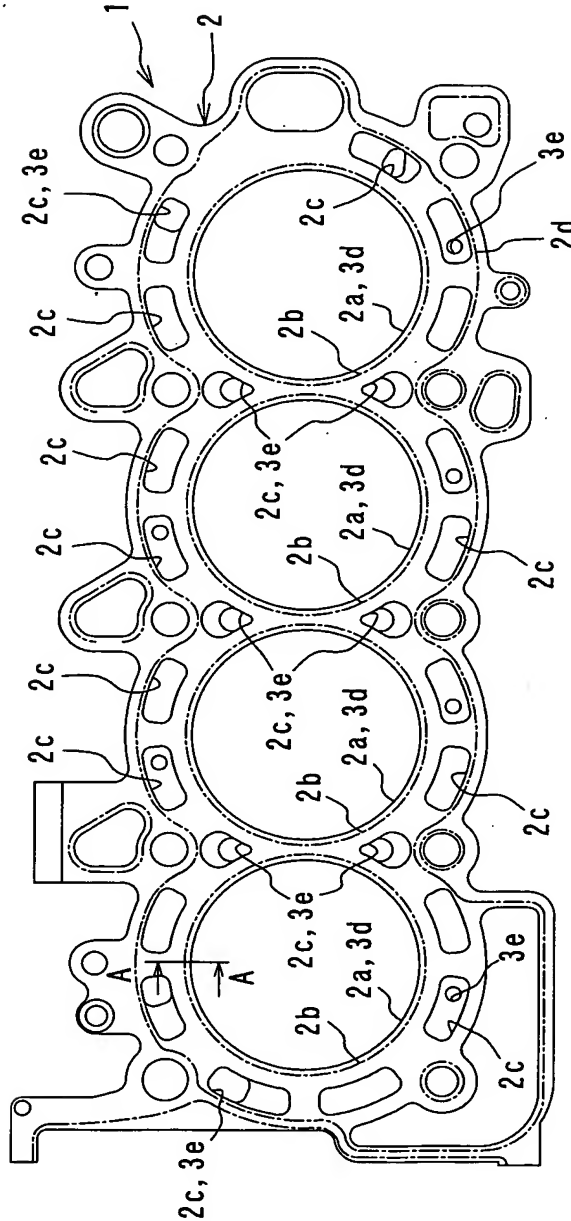



2 / 2 5

FIG. 2

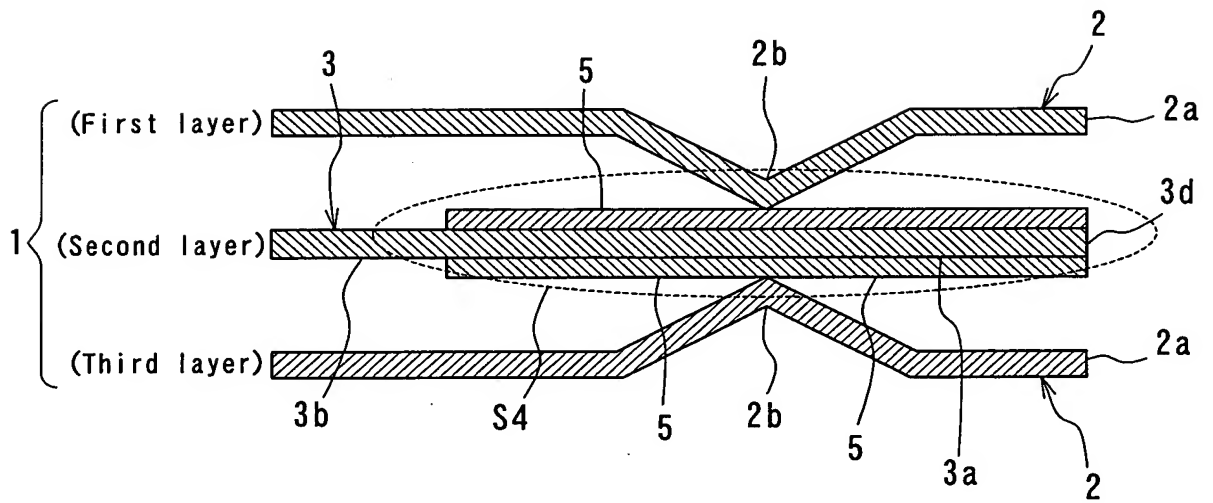

3 / 2 5

FIG. 3

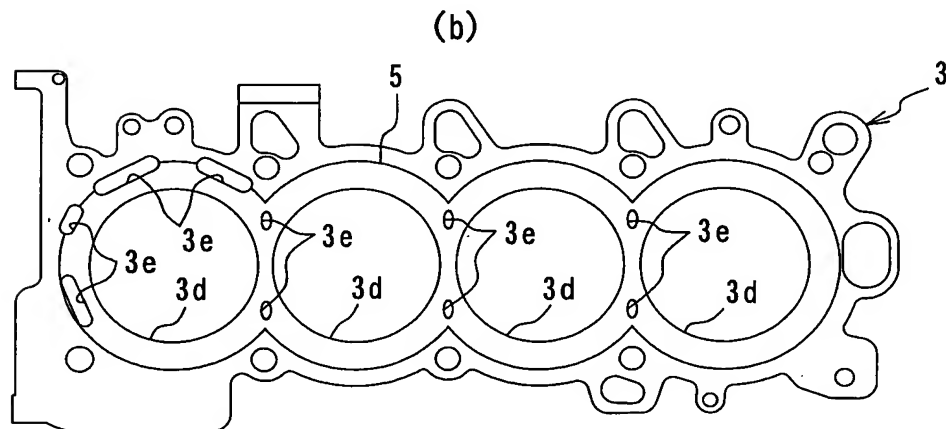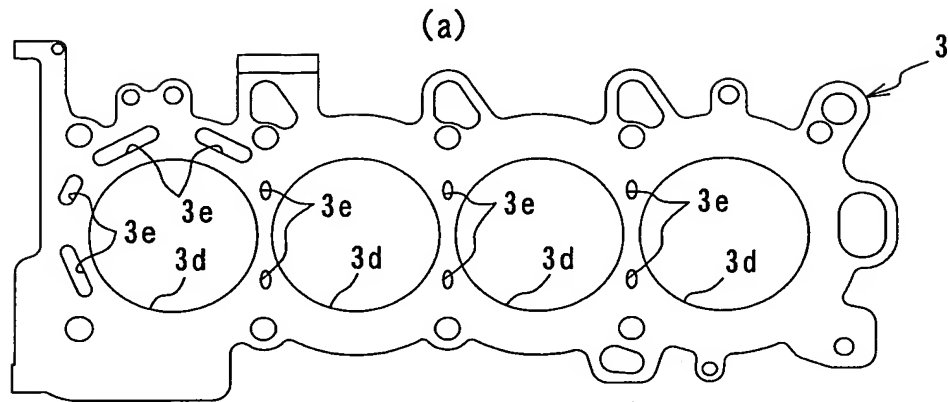

4 / 2 5

FIG. 4


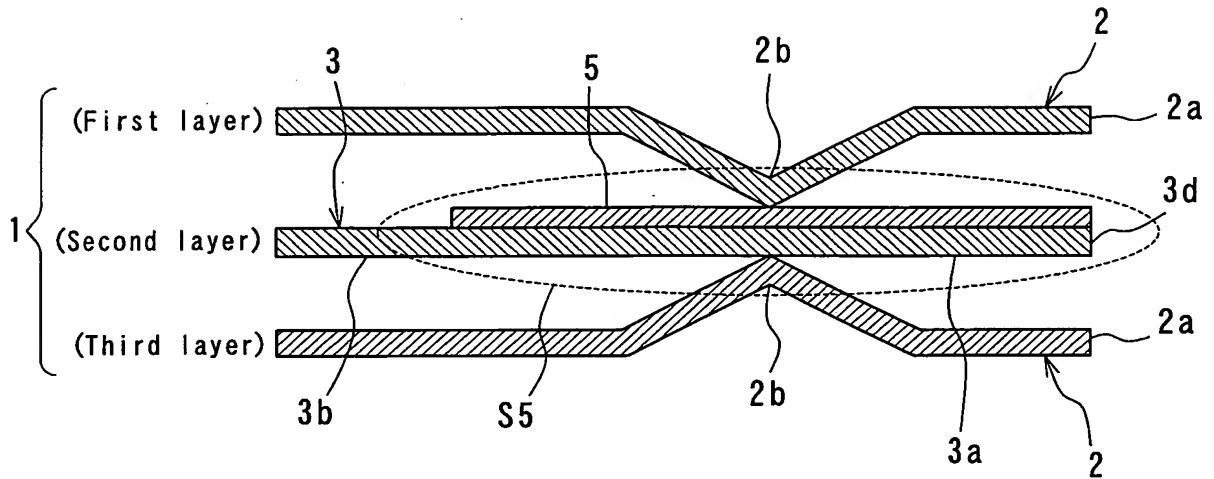


FIG. 5

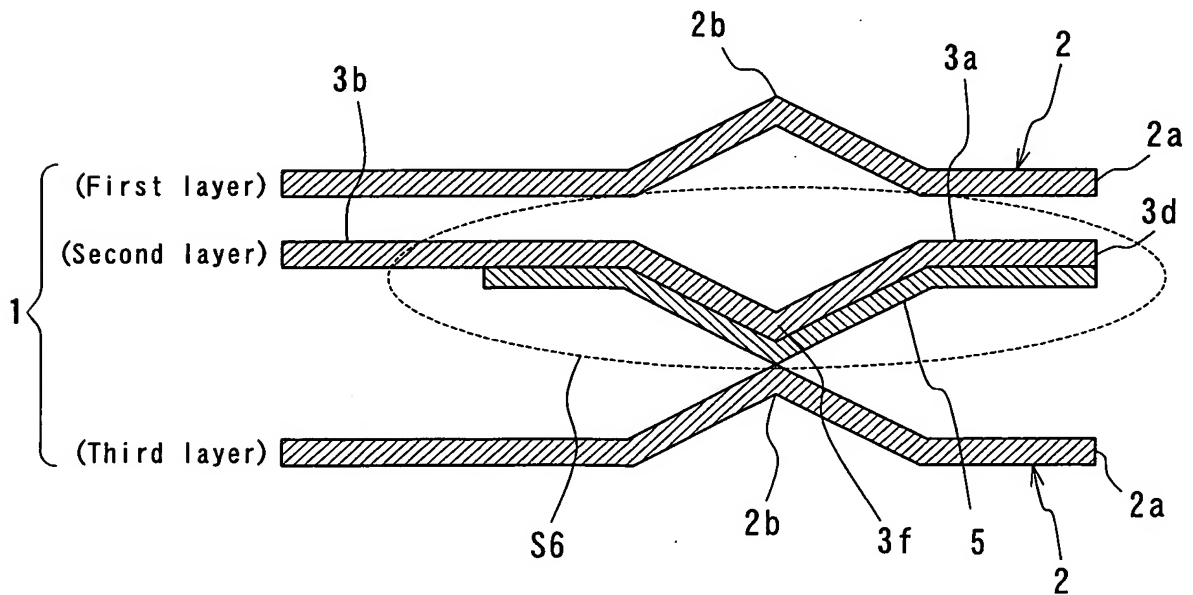

5 / 2 5

FIG. 6


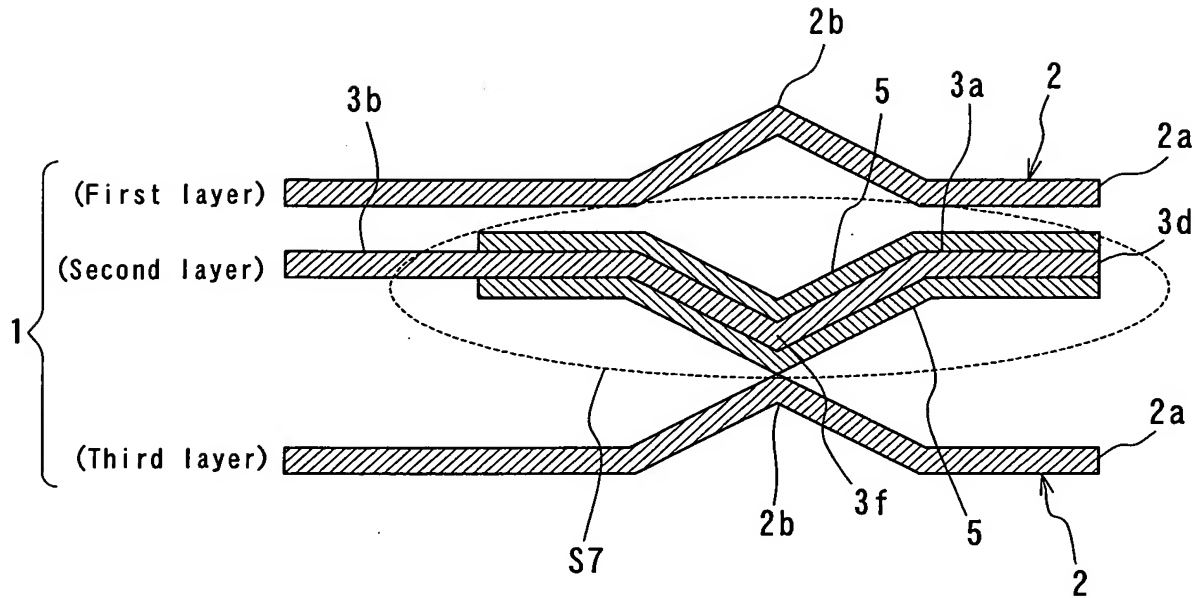


FIG. 7

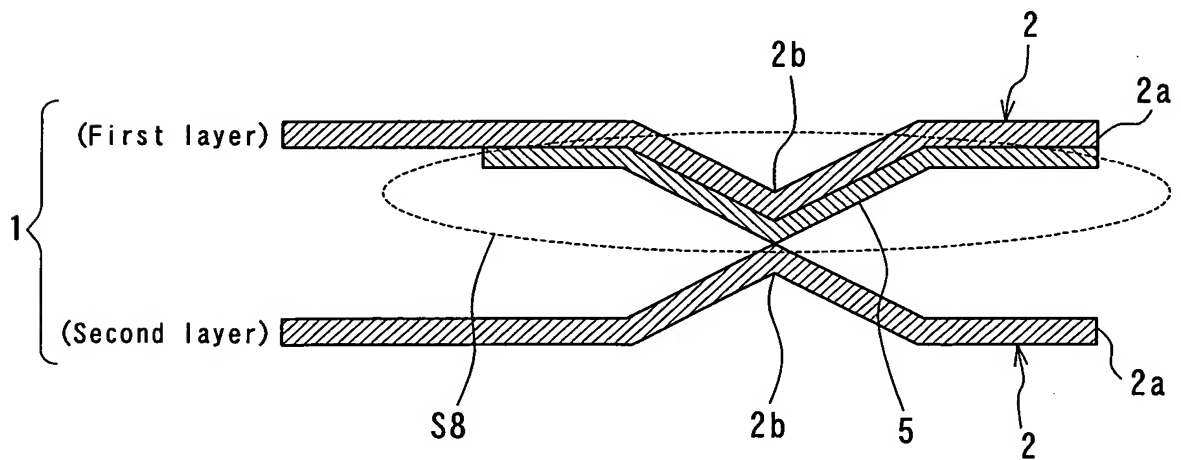

6 / 2 5

FIG. 8



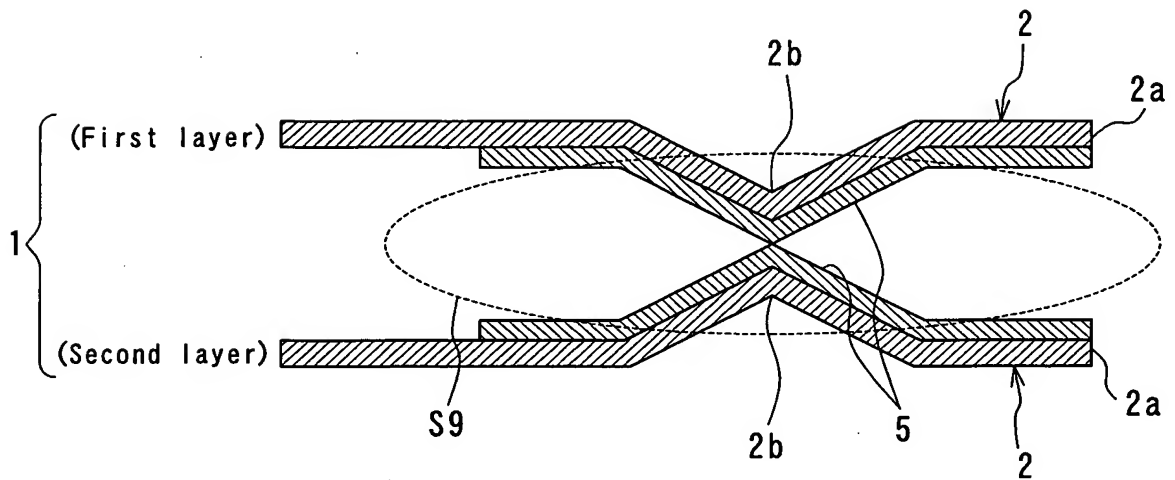


FIG. 9

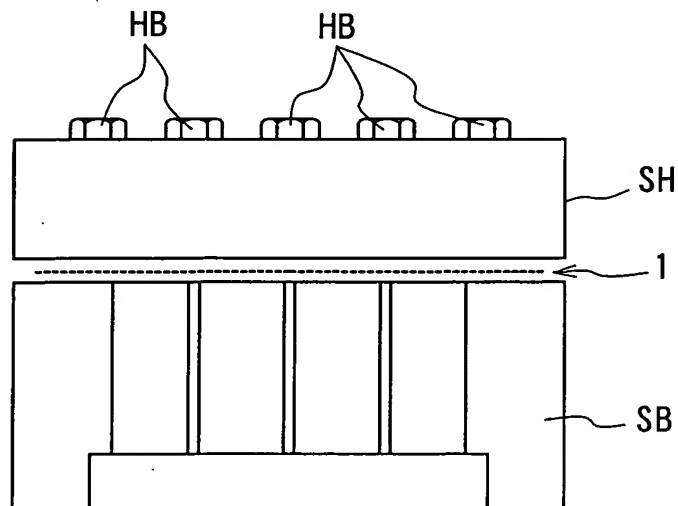

7/25


FIG. 10

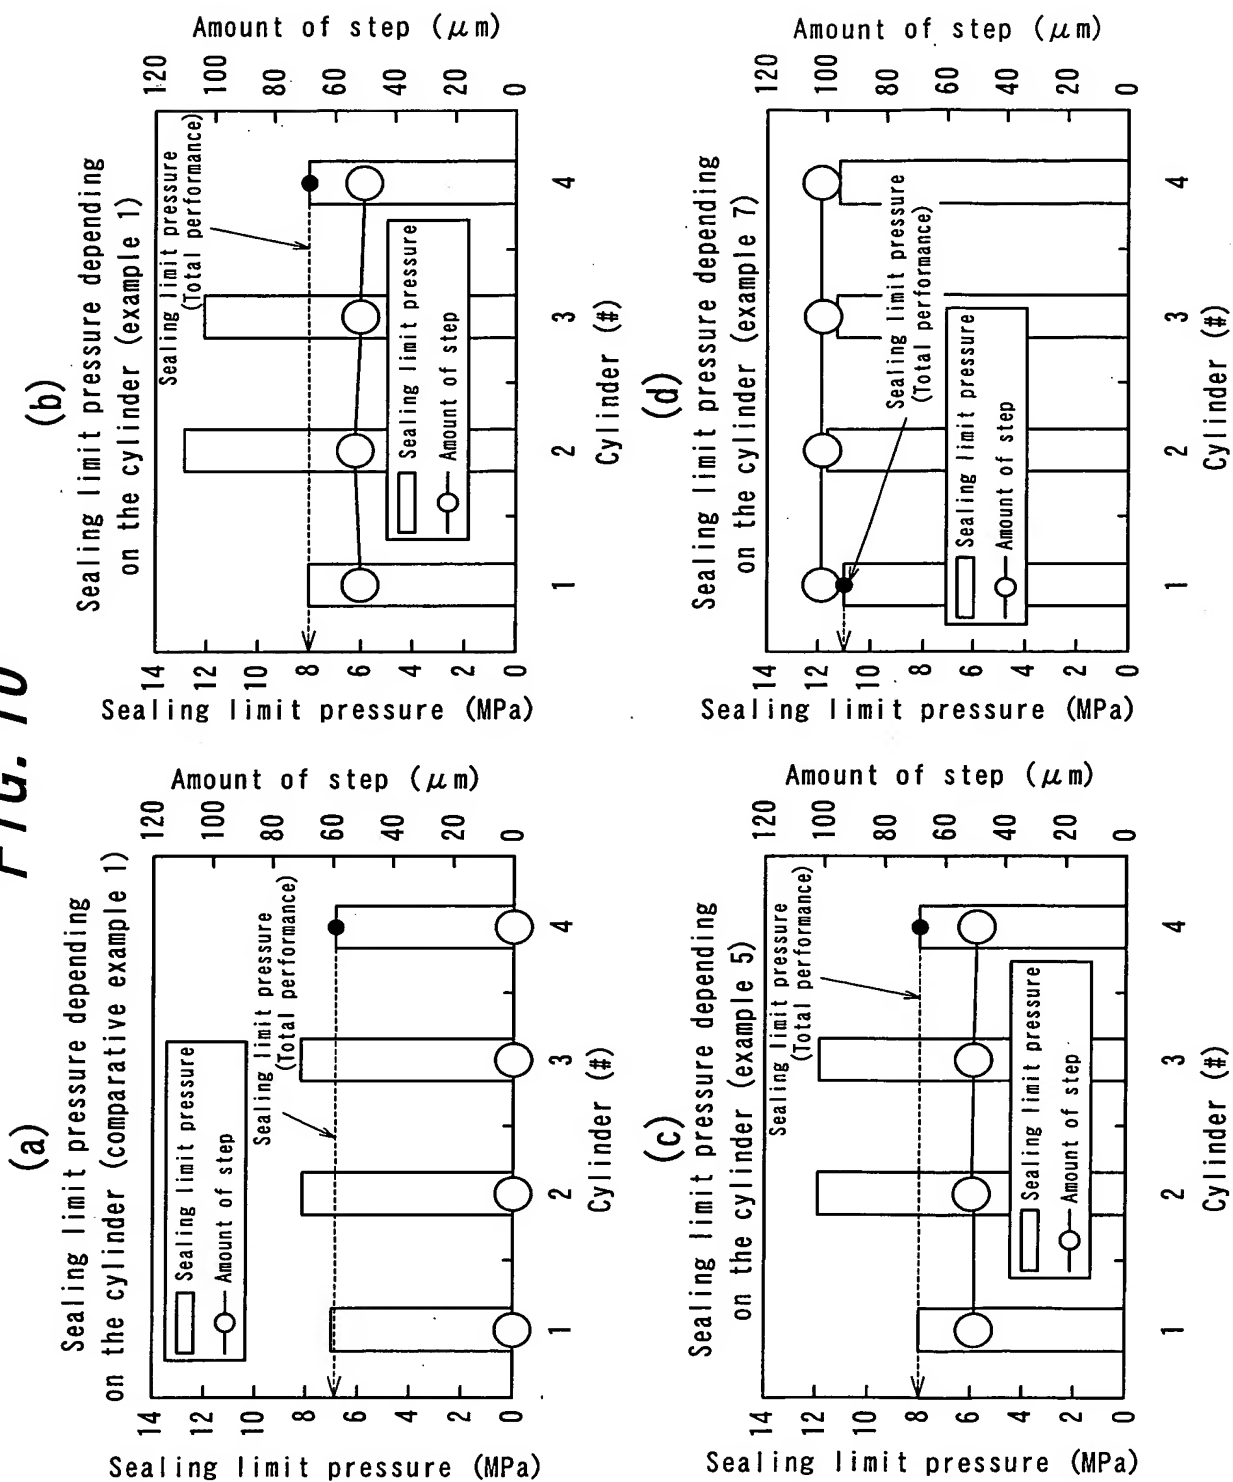

10/550010


8/25

FIG. 11

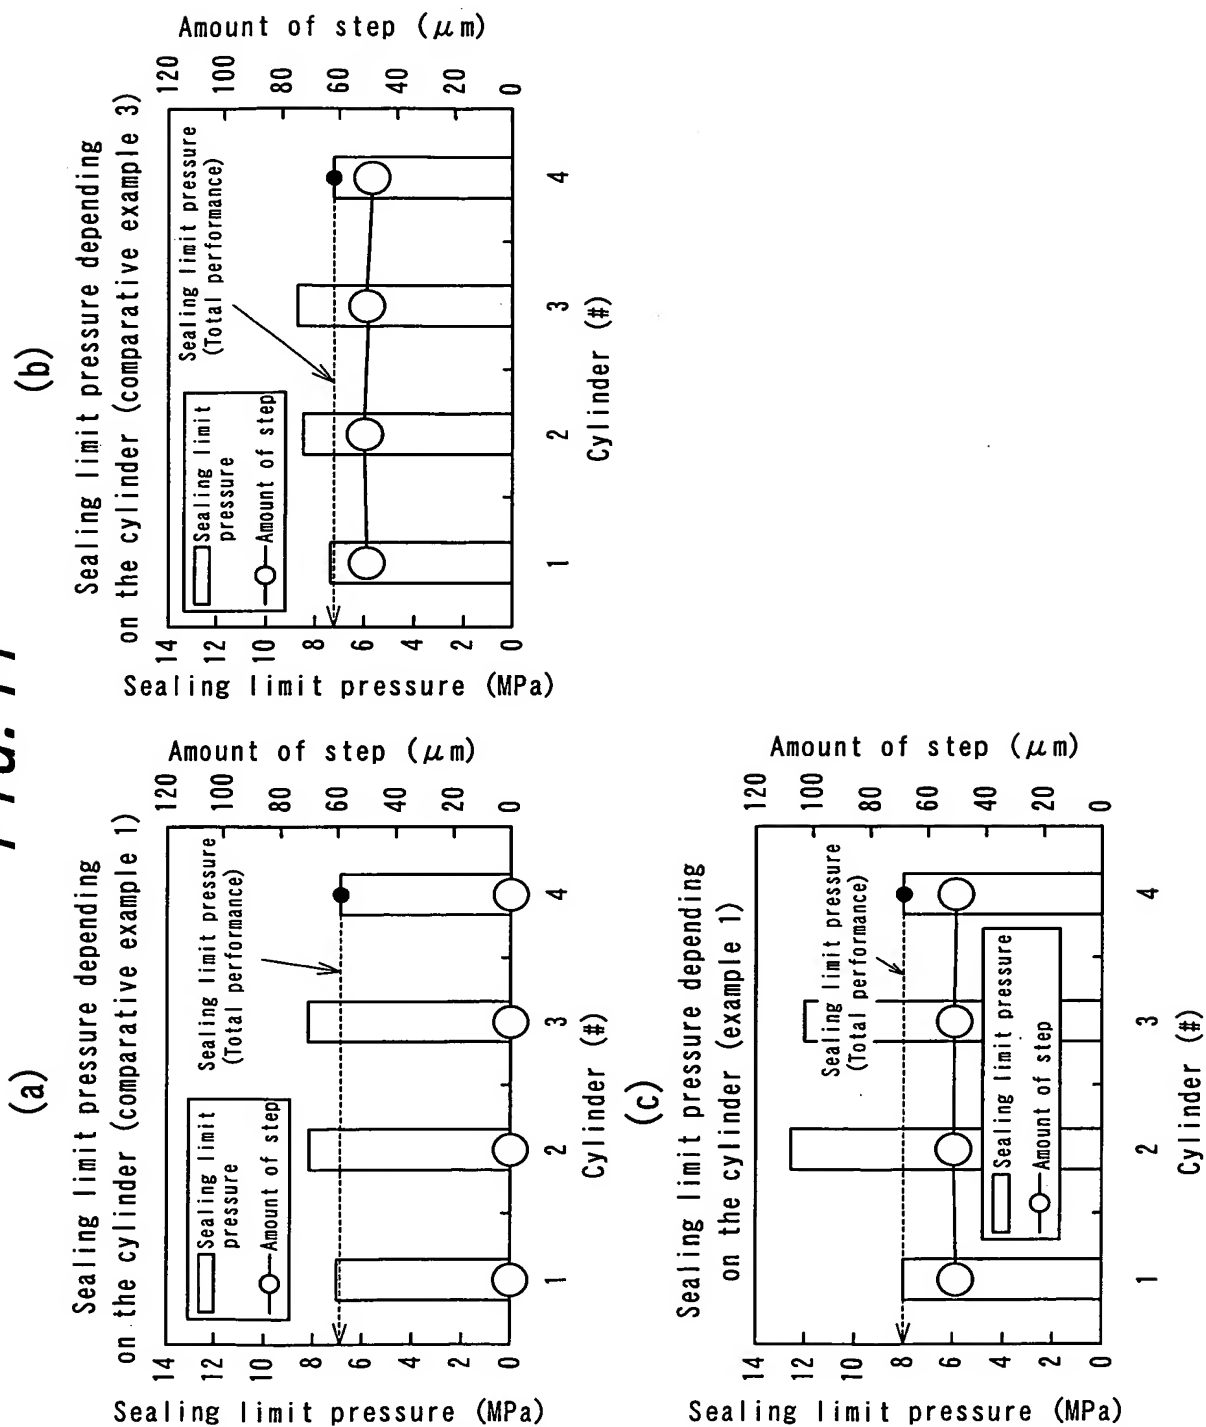

10/550010

9/25

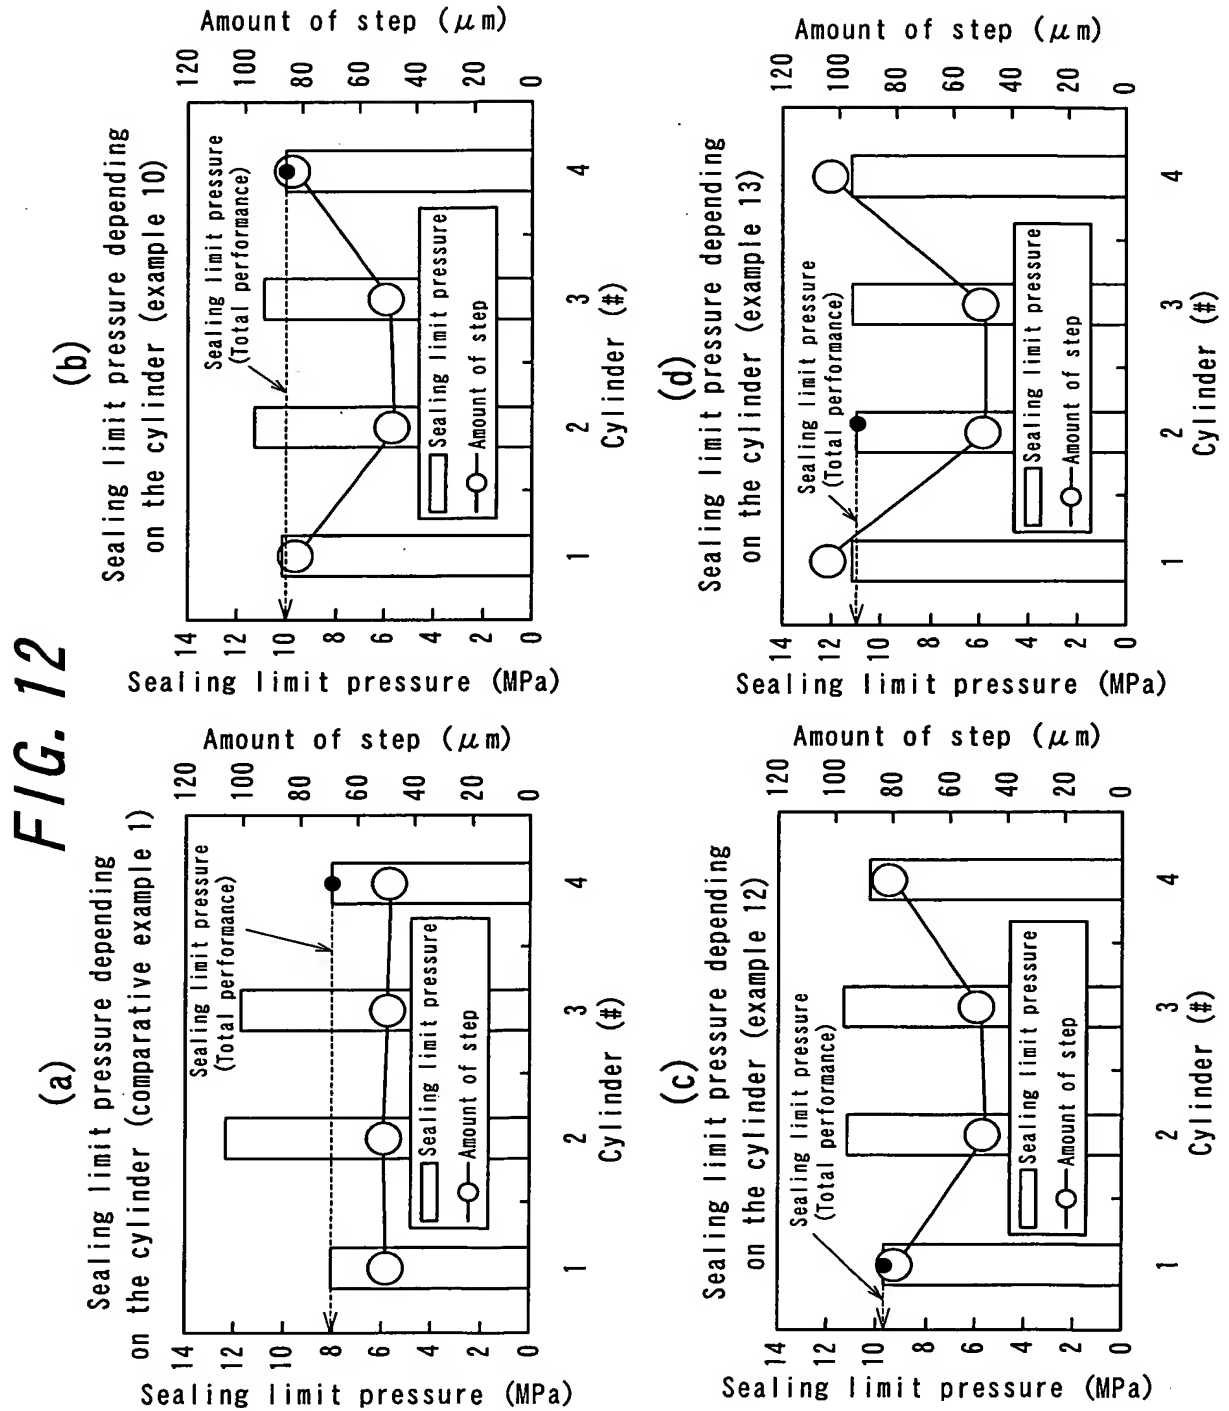

10/550010

10/25

FIG. 13


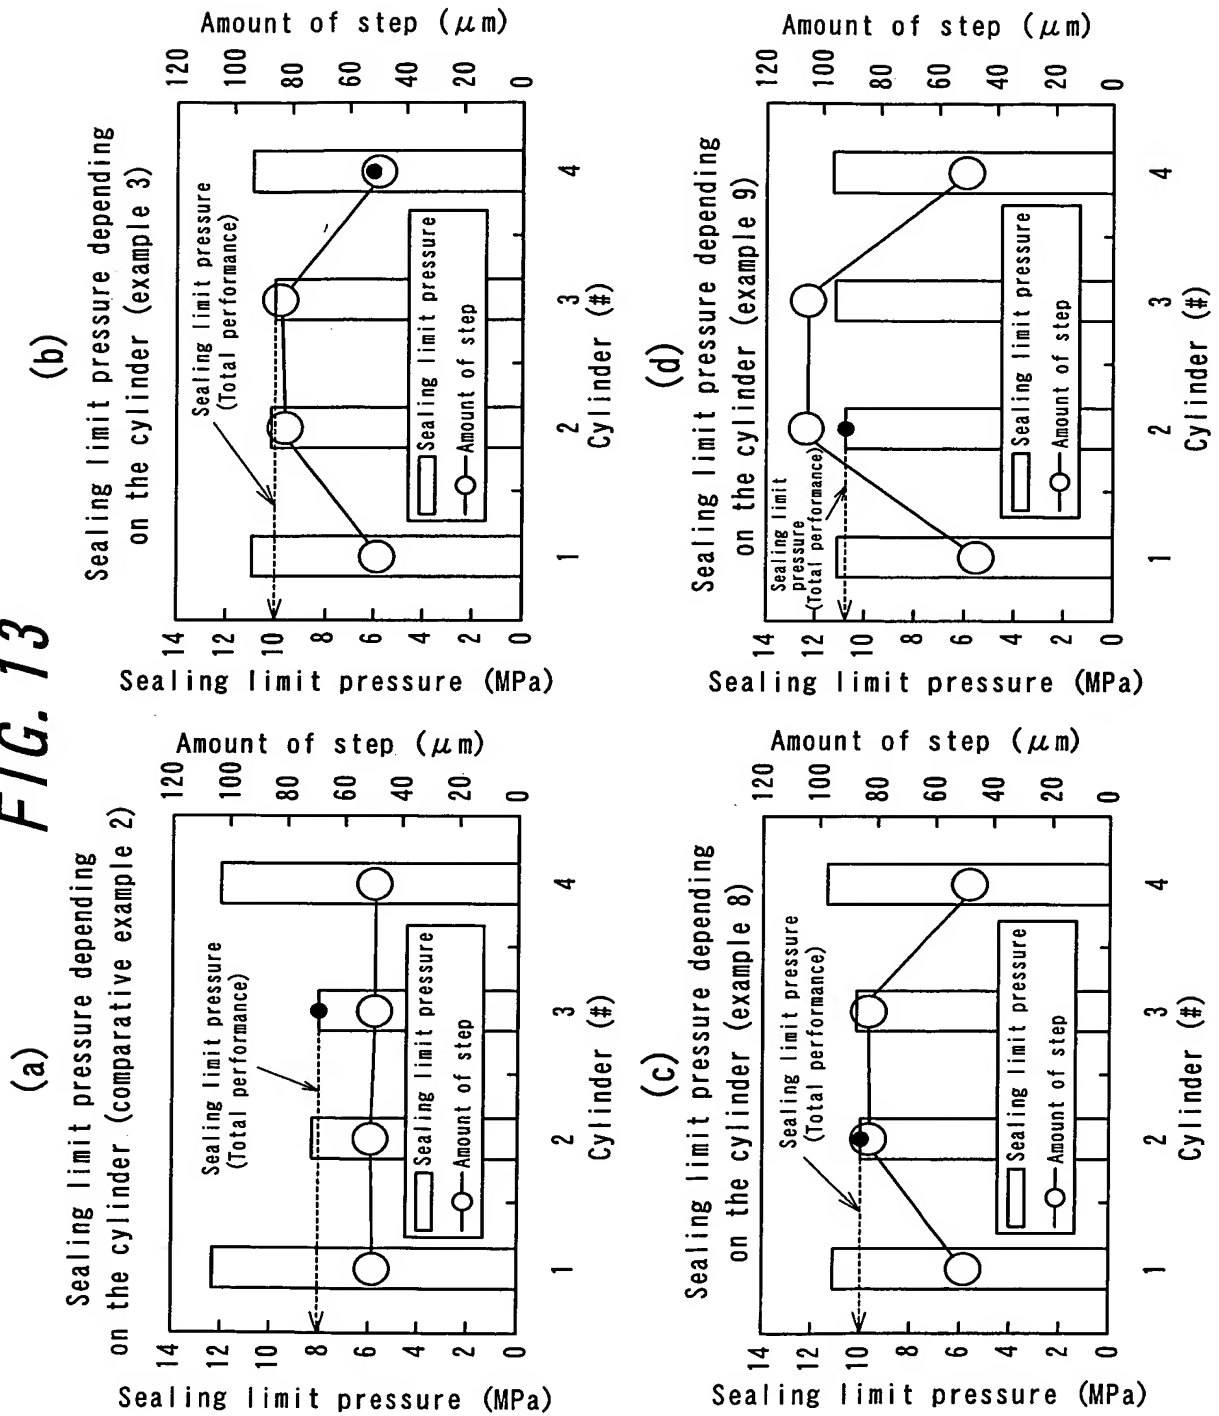


FIG. 14



12/25

FIG. 15

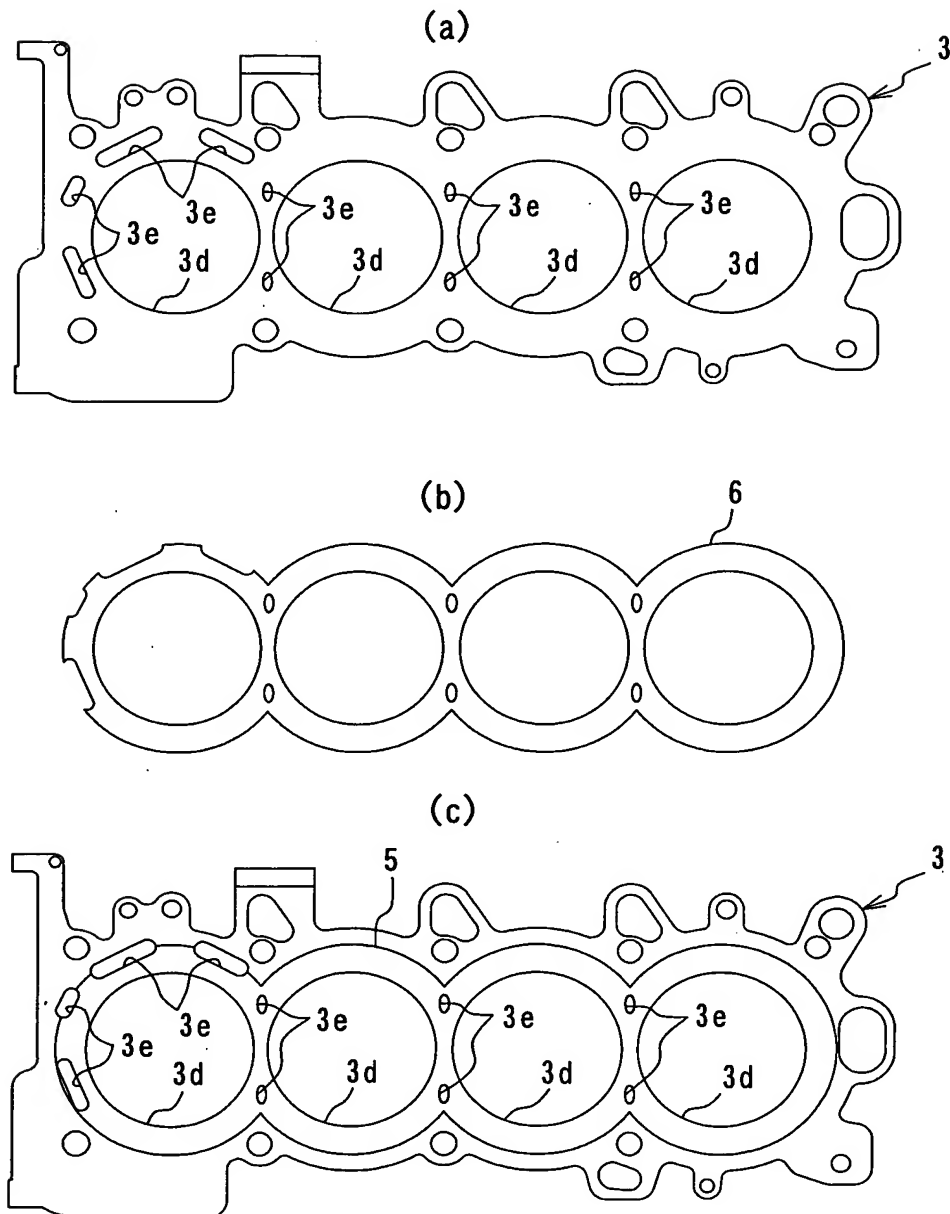

13/25

FIG. 16



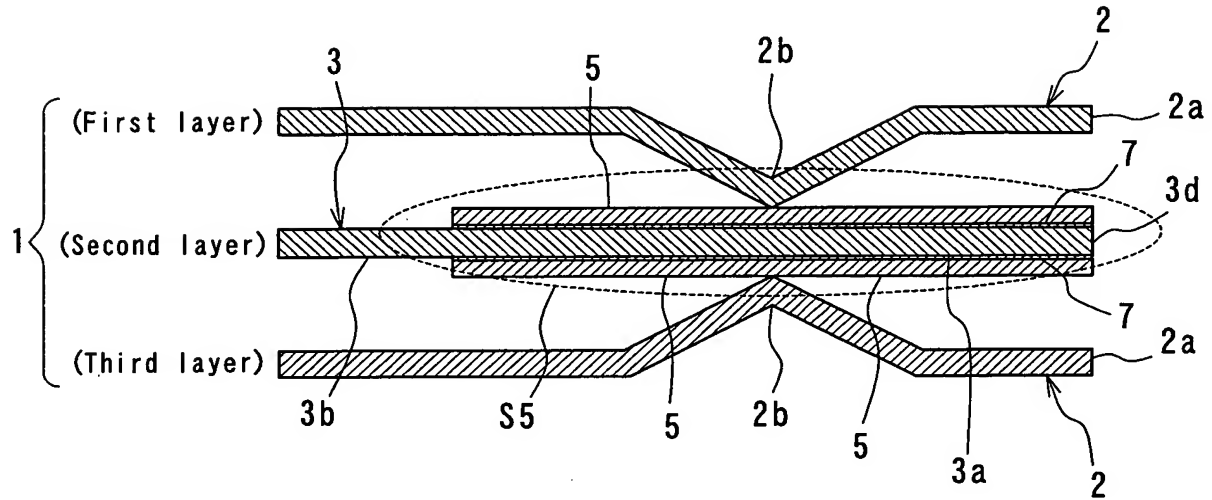


FIG. 17

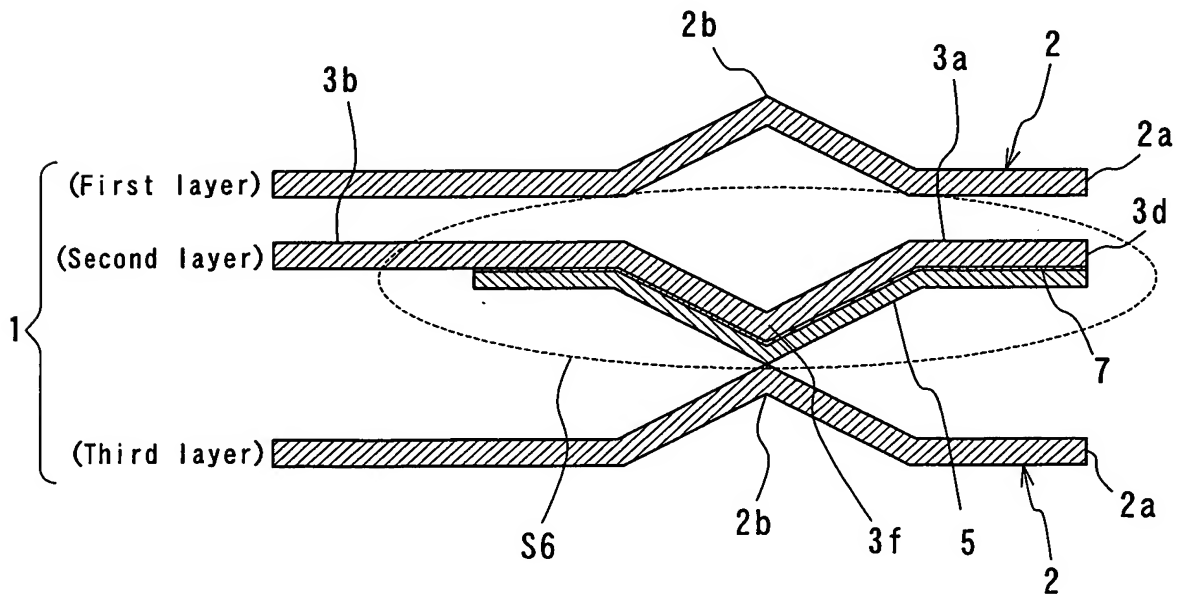

14/25


FIG. 18

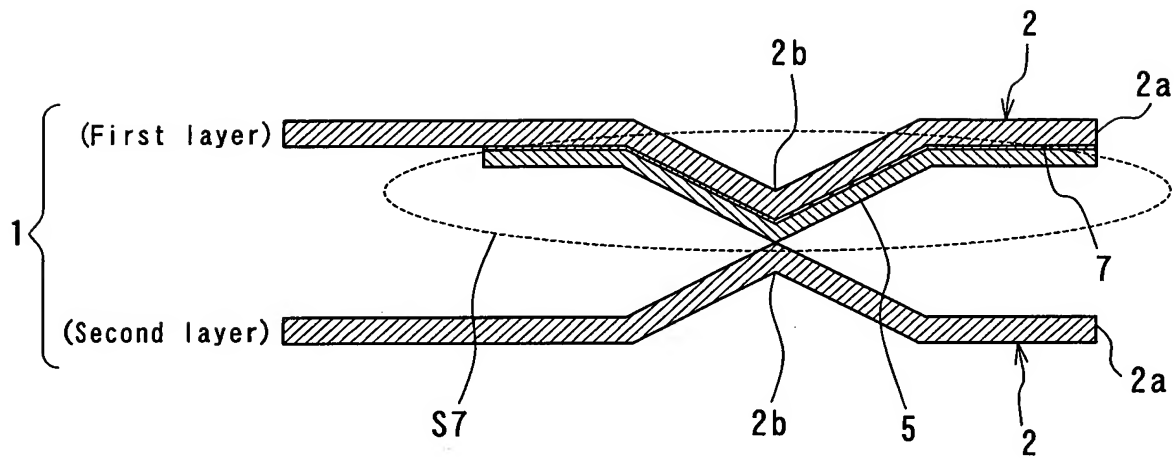

15/25


FIG. 19

Sealing properties of cylinder hole portions of cylinder head gasket after 200°C×400hr thermal degradation

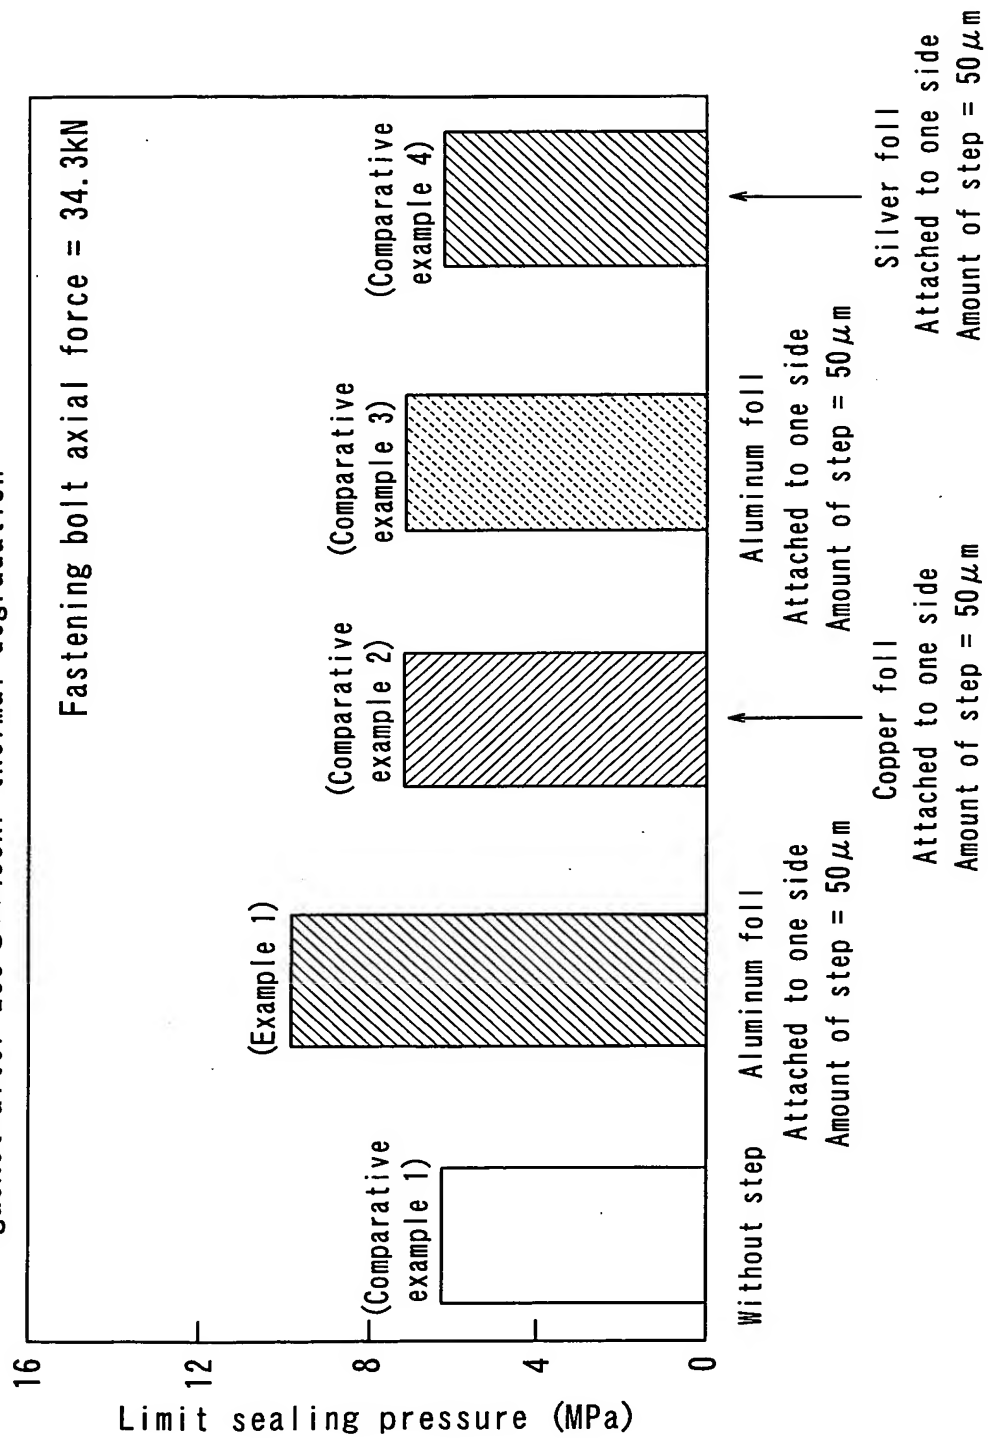

16/25

FIG. 20

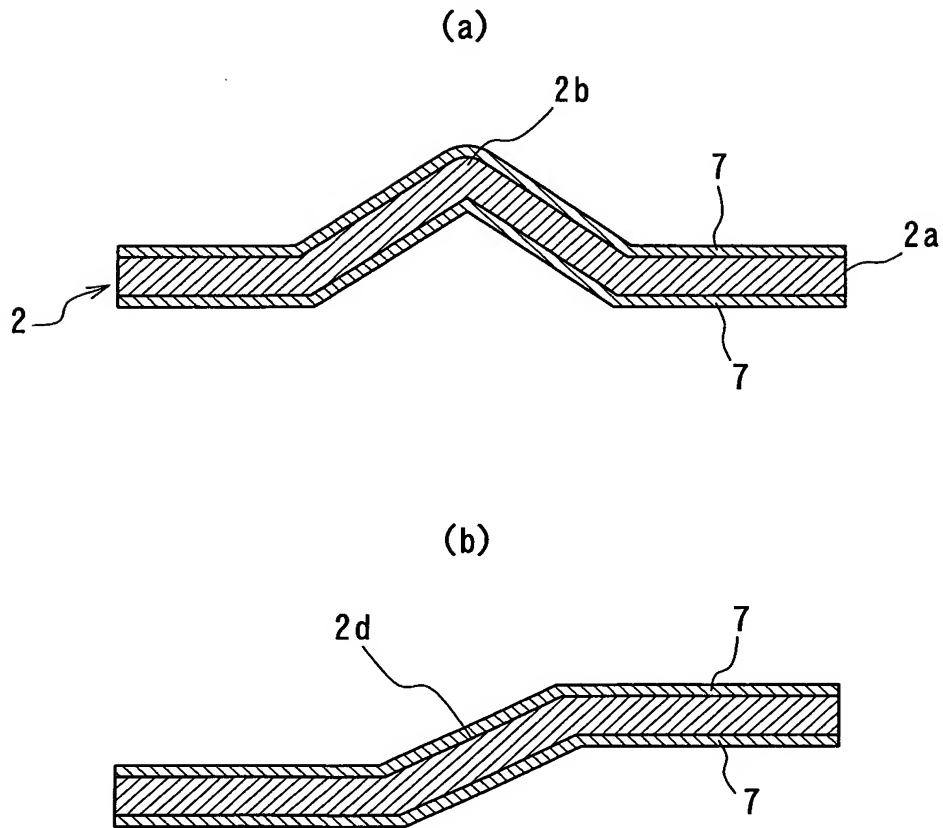

17/25

FIG. 21


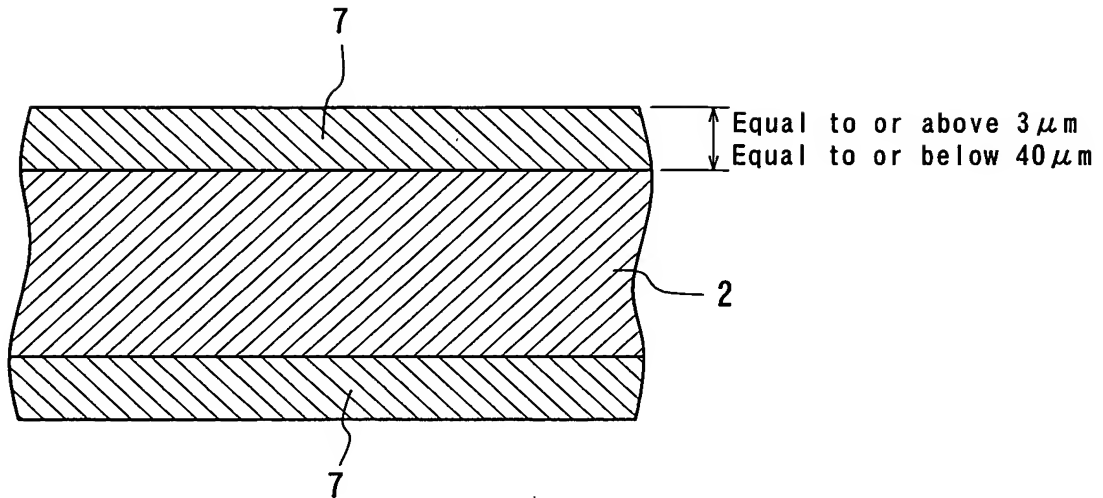



FIG. 22

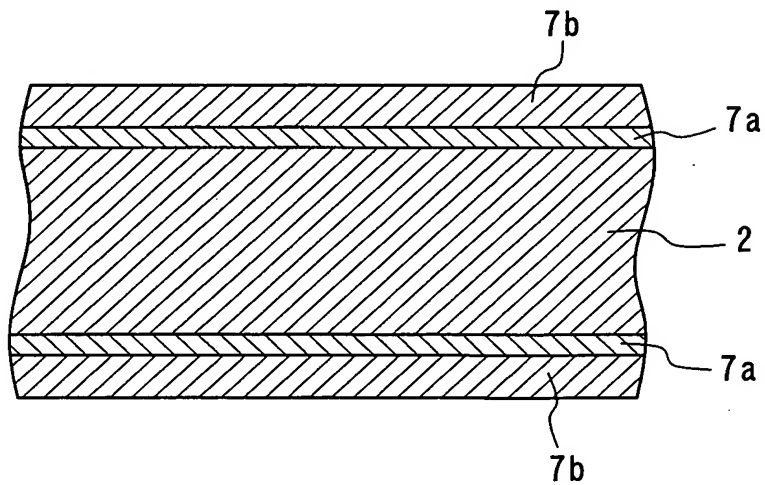


18/25

FIG. 23

(a)

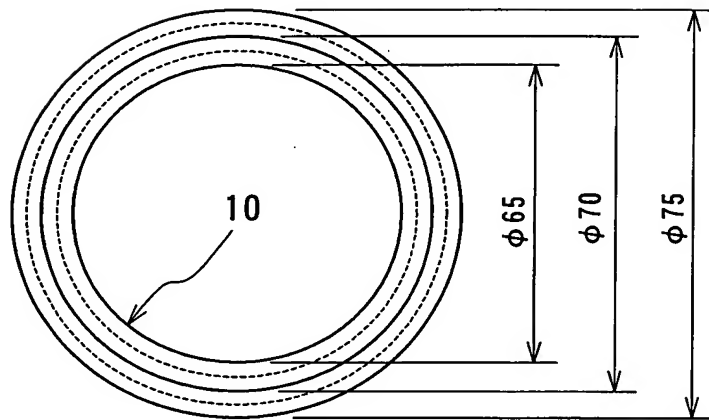


(b)

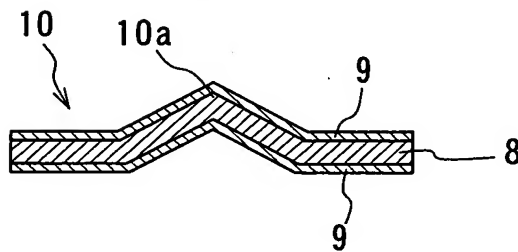


19/25

FIG. 24

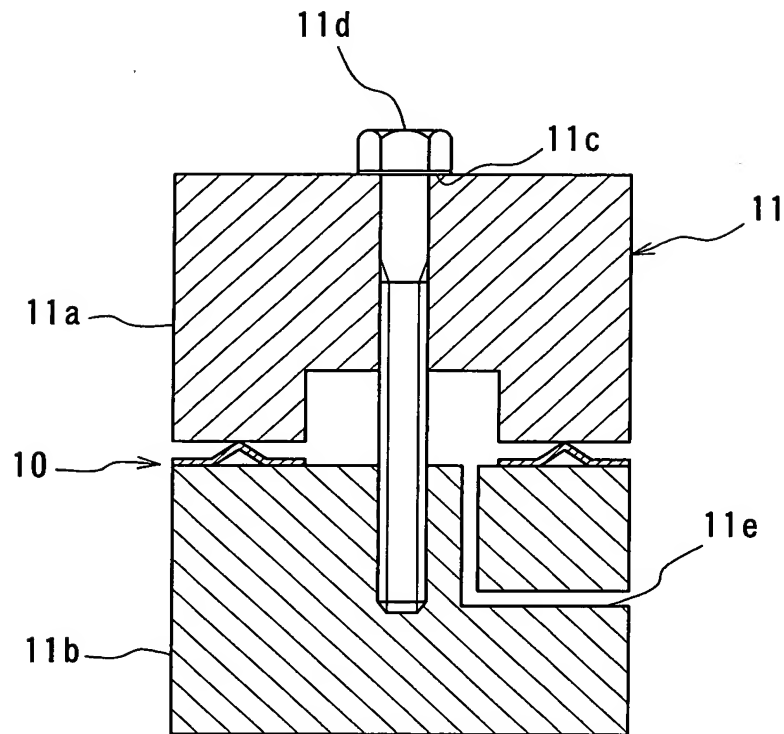


20/25

FIG. 25

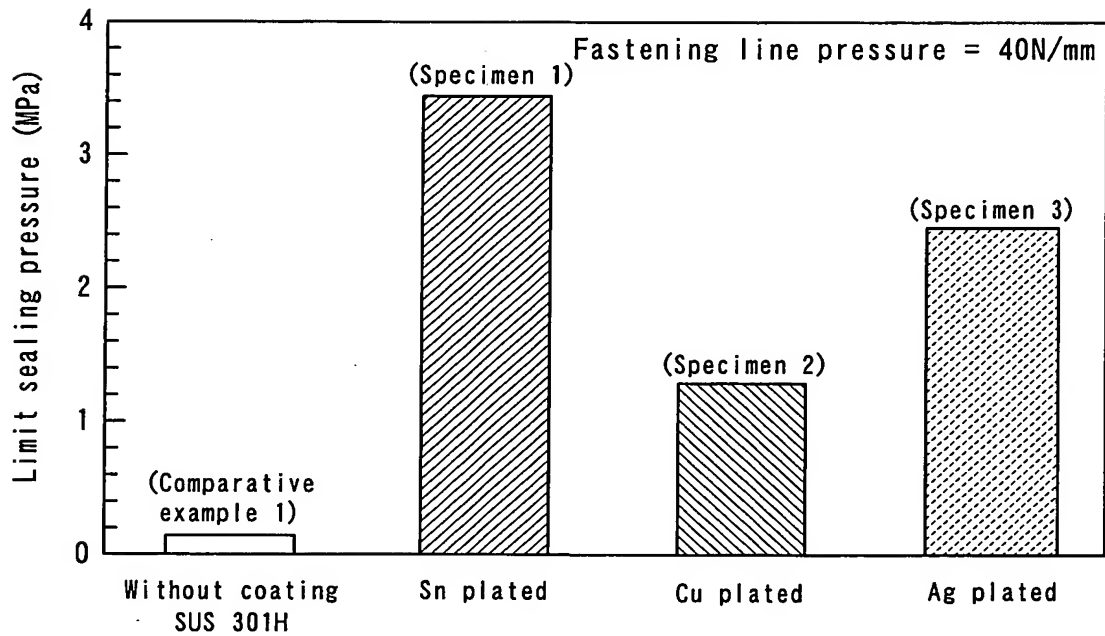


21/25

FIG. 26

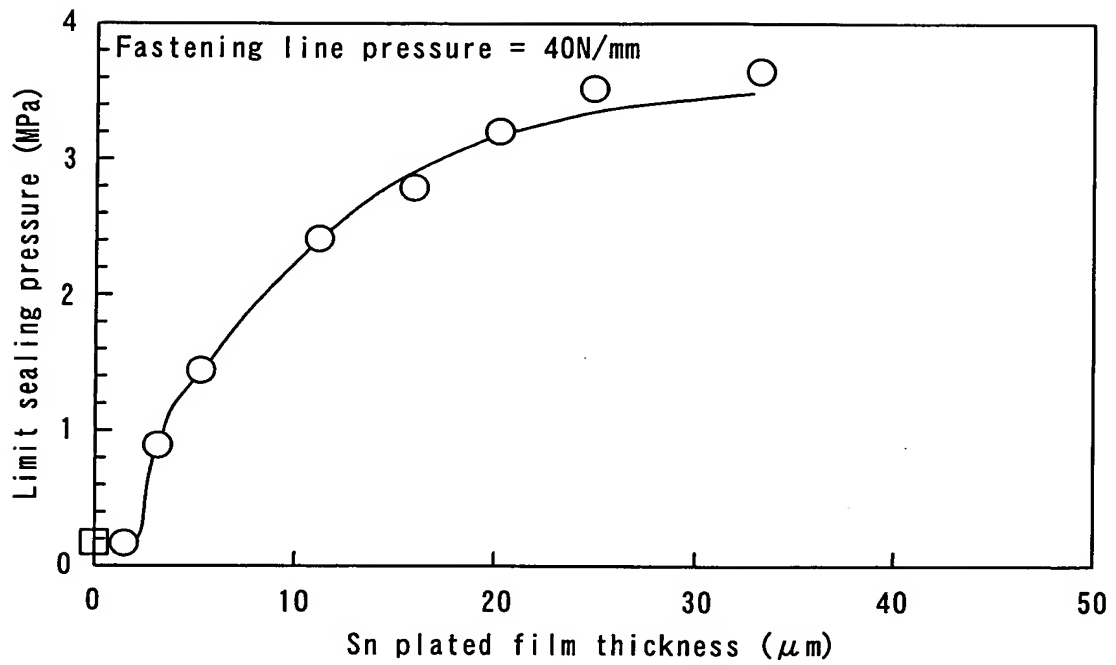

22/25

FIG. 27

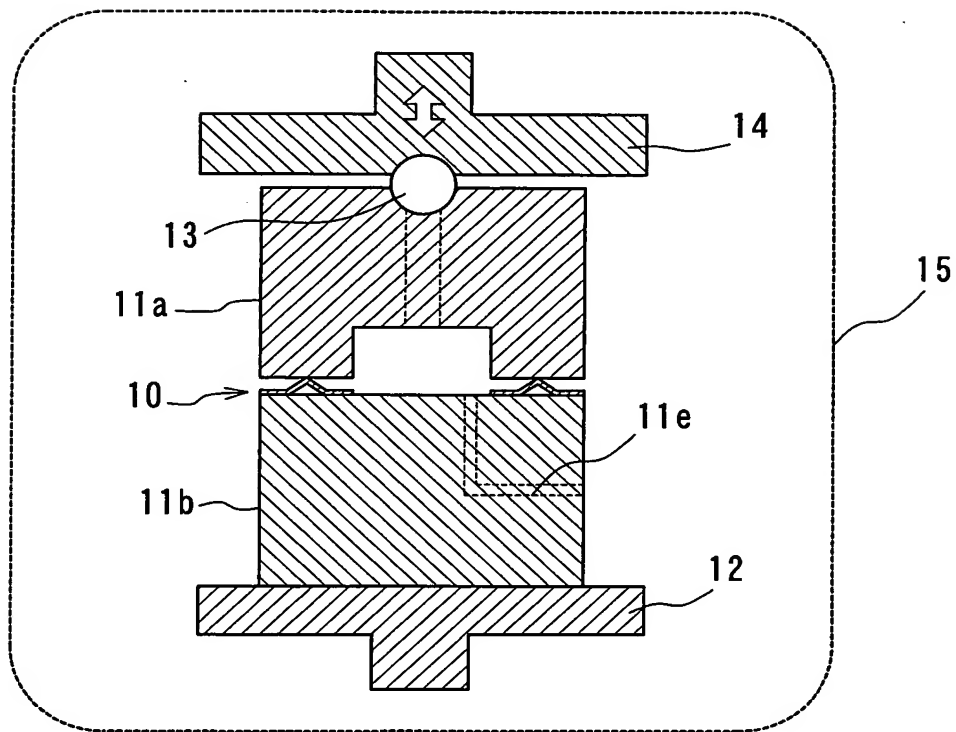

23/25

FIG. 28


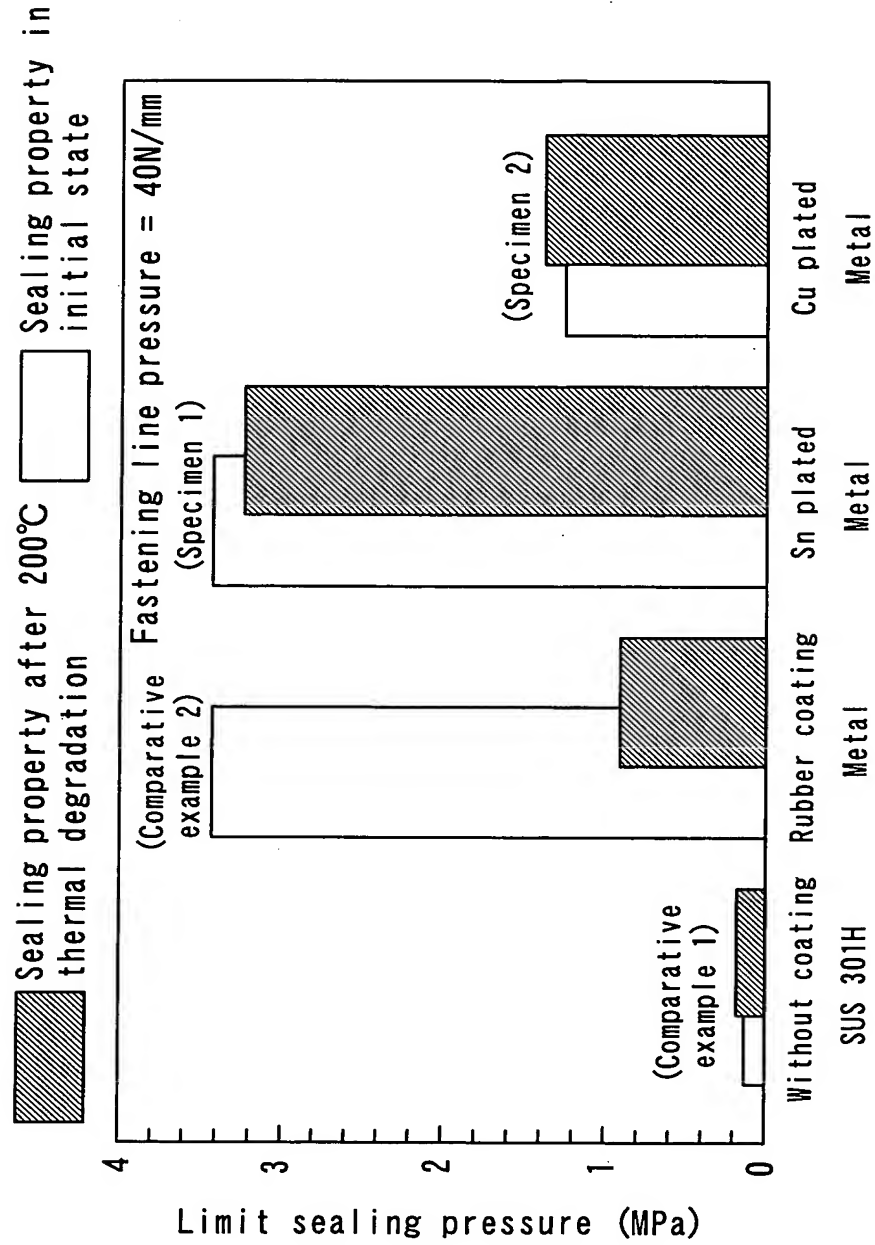


FIG. 29

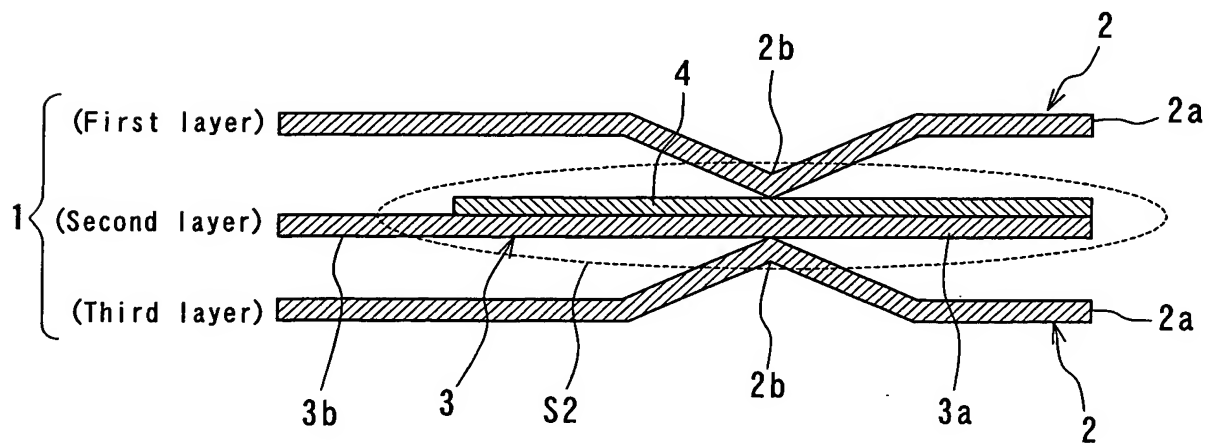

25/25

FIG. 31

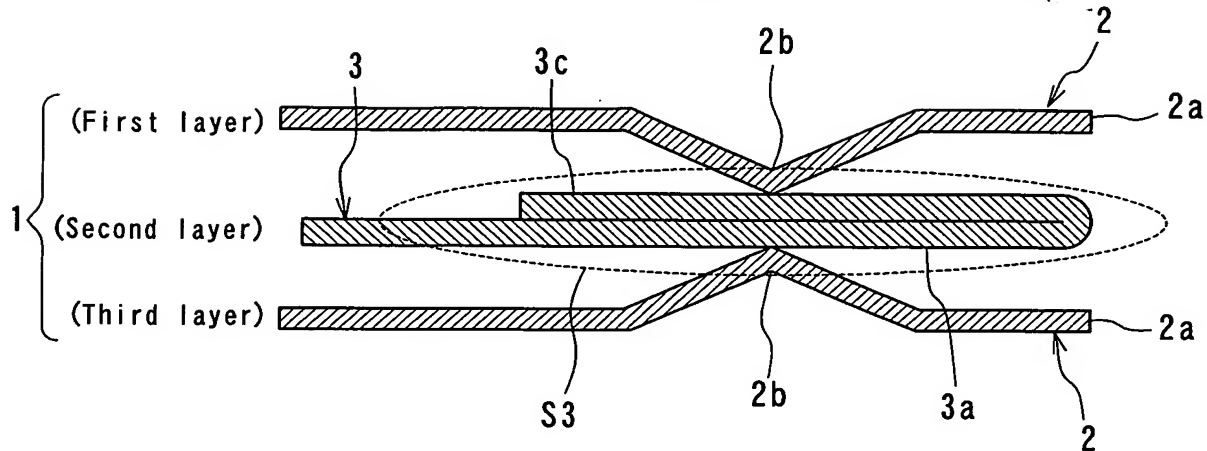


FIG. 32

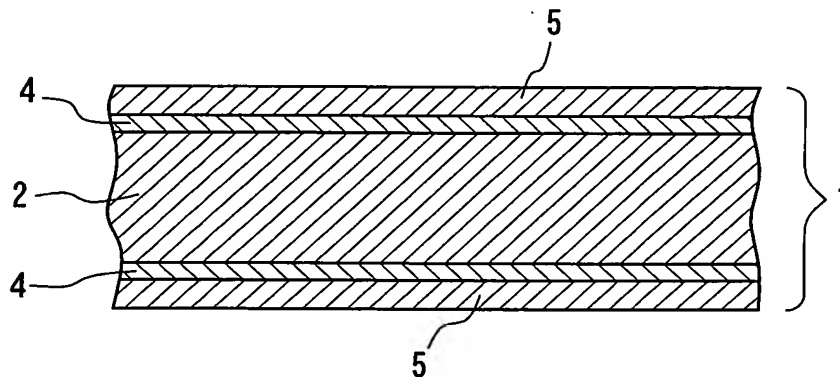


FIG. 33

